

KB-GF41-S

SPECIFICATION

- Feature : 41 Selection 1 Rooms, 6 Shelves, Cold Only
- Dimensions (mm) : Width 813 × Required Depth 934
(Front 26(numeric keypad) + Body 908) × Height 1846
- Selection Button No. : 12 (Ten Key, Insert, Cancel)
- Coin Mechanism : Factory default not equipped
- Bill Validator : Factory default not equipped
- Capacity : 492pcs (Carton pack 250ml), 328pcs (Can 330ml)
- Power Specification : Single phase 220V - 240V, 50 Hz
- Lightning : Line-type LED
- Rate Input Power : 410W
- Power Consumption : 5,4 kwh/day
- Vending System : Conveying Belt
- Refrigerant : R134a/230g
- Empty Weight : 245kg


Structure Column

Shelf	Row						
	A	B	C	D	E	F	G
1	1	2	3	4	5	6	7
2	8	9	10	11	12	13	14
3	15	16	17	18	19	20	21
4	22	23	24	25	26	27	28
5	29	30	31	32	33	34	35
6	36	37	38	39	40	41	

COLD

Close Distance

Because of shorten the distance of the front panel and the rack, can see in the closer the product.

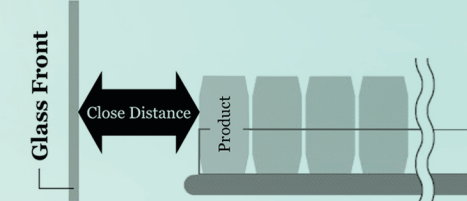

Indoor use only

Capacity By Column

Type of Product	shelf						available row	capacity pcs/column	Max/machine
	1	2	3	4	5	6			
330mL Wide Can	○	○	○	○	○	○	all	8	328
200mL Carton Pack	○	○	○	○	○	○	all	12	492
250mL Carton Pack	○	○	○	○	○	○	all	12	492
280mL PET(circle shape)	x	x	x	○	○	○	all	8	160
500mL PET(circle) Coca-Cola (φ69, 225mm height)				○	x		all	8	56
500mL PET(box) Bollpic (□69, 210mm height)				○	○		all	8	112
600mL PET (under φ69, 210 - 260mm height)				○	x		all	8	56
600mL PET (φ69 - φ73, under 260mm height)				○	x		B,D	8	16

- Note :
- Capacity may vary depending on the package condition on the shelf.
 - Depending on the packaging size and hardness, some merchandise may not be suitable for sale.

PT. METEC SEMARANG

Sales & Marketing Office
 The Manhattan Square Building
 Mid Tower 3rd Floor Unit C & D
 Jl. T.B. Simatupang Kav.1S, Cilandak Timur,
 Jakarta Selatan, Indonesia 12560
 +62 21 29406798 / 99
 +62 21 29049897
 www.kubota-ptms.co.id

FACTORY

Tanjung Mas Export
 Processing Zone
 Jl. Coaster No 8 Blok B 12A-16
 Semarang-Indonesia
 +62 24 3520435 - 37
 +62 24 3520432

Our sale and customer service will support you throughout Indonesia. We serve also sparepart and service. For further information, do not feel hesitate to contact us.



For Earth, For Life

KUBOTA Vending Machine

KB-GF41-S

Kubota Glass Front Vending Machine
 41 Selection



Indoor use only



Visibility
 Easy View, Easy to Select,
 Getting Closer to
 the Commodity



Attractive
 Attractive Catcher Product
 Movement,
 Catcher's Motion in X, Y Pattern



Versatility
 MDB Interface, All Product
 Can be Sold.
 (Based on dimensions,
 weight, and fix the bucket)



Numeric Keypad
 Simple and easy to use



**Delivery Port
 with Push Open Type**
 Retrieve the Product
 with One Hand



**Energy Saving
 Technology**
 Highly sophisticated R134a
 refrigeration system and
 LED lightning will contribute
 to low energy consumption

www.kubota-ptms.co.id

*This Brochure is only for Malaysia & Singapore Market

KB-GF41-S Indoor use only

Item	Specification																																																								
Spec for Country	Malaysia/Singapore																																																								
Feature	41 Selections 1 Rooms, 6 shelves, cold only																																																								
Dimensions (mm)	Width 813 × Required Depth 934 (Front 26(numeric keypad)+Body 908) × Height 1846																																																								
Back Clearance	50 mm																																																								
Sales Variation	41 Selections																																																								
Coin Mechanism	Factory default not equipped (Coin mech installable: Manufactured by ICT) (CC6100M2L00LOMY3CF00)																																																								
Bill Validator	Factory default not equipped (Bill Validator installable : Manufactured by ICT) (XBA-34DNMMY6)																																																								
Power Specification	Single phase 220V - 240V, 50 Hz																																																								
Selection Button No.	<Selection Button No> <table border="1" style="display: inline-table; vertical-align: middle;"> <tr><td>1</td><td>2</td><td>3</td></tr> <tr><td>4</td><td>5</td><td>6</td></tr> <tr><td>7</td><td>8</td><td>9</td></tr> <tr><td>Cancel</td><td>0</td><td>Enter</td></tr> </table> numeric keypad system	1	2	3	4	5	6	7	8	9	Cancel	0	Enter																																												
1	2	3																																																							
4	5	6																																																							
7	8	9																																																							
Cancel	0	Enter																																																							
Column Structure	Row <table border="1" style="display: inline-table; vertical-align: middle;"> <tr><td></td><td>A</td><td>B</td><td>C</td><td>D</td><td>E</td><td>F</td><td>G</td></tr> <tr><td>1</td><td>1</td><td>2</td><td>3</td><td>4</td><td>5</td><td>6</td><td>7</td></tr> <tr><td>2</td><td>8</td><td>9</td><td>10</td><td>11</td><td>12</td><td>13</td><td>14</td></tr> <tr><td>3</td><td>15</td><td>16</td><td>17</td><td>18</td><td>19</td><td>20</td><td>21</td></tr> <tr><td>4</td><td>22</td><td>23</td><td>24</td><td>25</td><td>26</td><td>27</td><td>28</td></tr> <tr><td>5</td><td>29</td><td>30</td><td>31</td><td>32</td><td>33</td><td>34</td><td>35</td></tr> <tr><td>6</td><td>36</td><td>37</td><td>38</td><td>39</td><td>40</td><td>41</td><td></td></tr> </table> <--- available 500ml PET Bottle under 260mm height <--- available 500ml PET Bottle under 210mm height		A	B	C	D	E	F	G	1	1	2	3	4	5	6	7	2	8	9	10	11	12	13	14	3	15	16	17	18	19	20	21	4	22	23	24	25	26	27	28	5	29	30	31	32	33	34	35	6	36	37	38	39	40	41	
	A	B	C	D	E	F	G																																																		
1	1	2	3	4	5	6	7																																																		
2	8	9	10	11	12	13	14																																																		
3	15	16	17	18	19	20	21																																																		
4	22	23	24	25	26	27	28																																																		
5	29	30	31	32	33	34	35																																																		
6	36	37	38	39	40	41																																																			
Hot/Cold Patterns	<table border="1" style="margin: auto;"> <tr><td colspan="8">COLD</td></tr> </table>	COLD																																																							
COLD																																																									

Exterior Design



Capacity by Column

Type of Product	shelf						available row	capacity pcs/column	Max/machine
	1	2	3	4	5	6			
330mL Wide Can	○	○	○	○	○	○	all	8	328
200mL Carton Pack	○	○	○	○	○	○	all	12	492
250mL Carton Pack	○	○	○	○	○	○	all	12	492
280mL PET(circle shape)	x	x	x	○	○	○	all	8	160
500mL PET(circle) Coca-Cola (φ69, 225mm height)				○	x		all	8	56
500mL PET(box) Bollpic (□60, 210mm height)				○	○		all	8	112
600mL PET (under φ69, 210 - 260mm height)				○	x		all	8	56
600mL PET (φ69 - φ73, under 260mm height)				○	x		B,D	8	16

Notes:

- Capacity may vary depending on the package condition on the shelf.
- Depending on the packaging size, hardness or other factors, some merchandise may not be suitable for sale.

Other Specification

Item	Specification	Item	Specification
Mechanical		Electrical	
1.Handle	Kubota standard	1.Communication Protocol	MDB
2.Lock	Kubota standard	2.Lighting specification	Line-type LED (non-adjustable)
3.Upper Hinge	Internal hinge	3.Remote Keyboard	equipped (English)
4.Door	Acrylic panel for protection	4. Rated input power*	410W
5.Selection equipment	Numeric keypad		
6.Heat Insulator	Urethane foamed by cyclopentane		
Cooling		Others	
1.Compressor	Reciprocating (220-240V, 50Hz)	1.Labels	English
2.Refrigerant	R134a	2.Manuals and Documents	English
3.Temperature Range	Chilled : 5°C	3.Suitable Locations	Indoor
		4.Empty Weight	245kg

*: power on the steady operation under the environmental temperature 32 °C